


**3 YEAR WARRANTY**

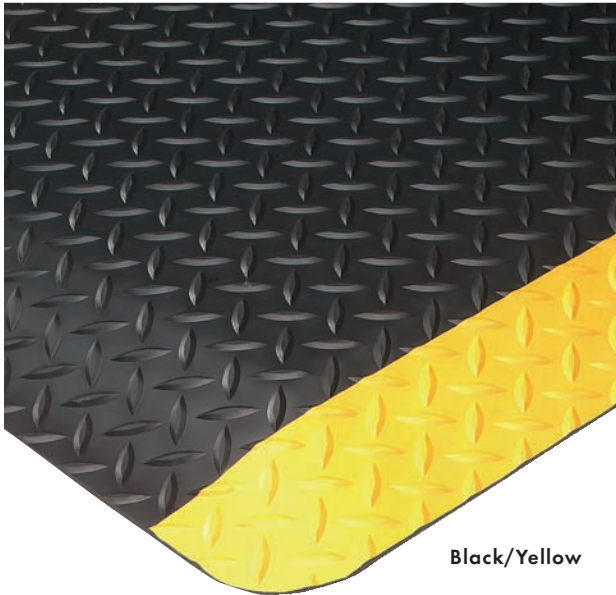

Black/Yellow


## Performance: **ULTIMATE**

If you want to be a hero to your employees, buy **UltraSoft Diamond-Plate!** It provides **unparalleled comfort**, resulting in enhanced employee productivity and morale. UltraSoft's long-term performance and exceptional feel are due to its double-thick Nitricell® Sponge base. Nitricell® is a unique composite loaded with Nitrile rubber for exceptional rebound and resilience. Designed for heavy-use areas, the popular, high-tech diamond-plate surface resists abrasion and most chemical spills, and is available with colored borders for maximum safety awareness. All edges are safety beveled.

## Performance: **BEST**

**Diamond-Plate SpongeCote** is the **original Diamond-Plate** anti-fatigue mat and definitely sets the standard for comfort in the industry. It is, without a doubt, one of the most popular anti-fatigue mats on the market today because it offers the complete package of comfort, enhanced productivity, long-term performance and an industrial image. It is identical to UltraSoft Diamond-Plate with one exception. Its Nitricell® Sponge base is a standard 3/8" thick.

**C** As an added bonus, both versions can be customized in virtually any width or dimension to fit even the most unique work area.

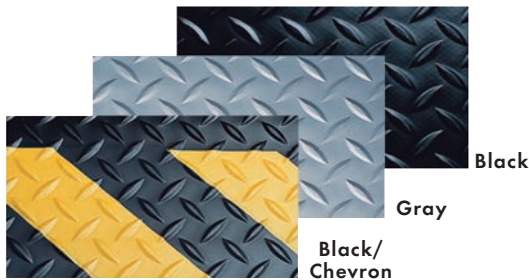


Black


Gray

Black/  
Chevron


### UltraSoft Diamond-Plate No. 414

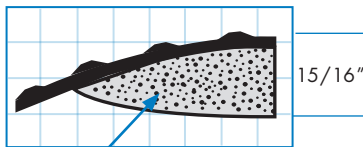


Double thick Nitricell® sponge base



### Diamond-Plate SpongeCote® No. 415

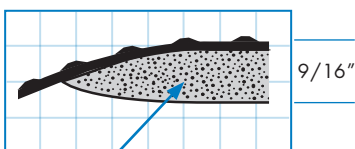

Nitricell® sponge base



## No. 414

## No. 415

Stock Sizes		Non-Stock Sizes	
15/16" Thick			
Part Number	Size	Part Number	Size
414.1516x2x3	2' x 3'	414.1516x2x75	2' x 75'
414.1516x3x5	3' x 5'	414.1516x3x75	3' x 75'
		414.1516x4x75	4' x 75'
		414.1516x5x75	5' x 75'
		414.1516x6x75	6' x 75'
<b>Cut Sizes up to 75' in length</b>			
<b>Note:</b> 5' and 6' widths are seamed and only available in Black or Black/Yellow.		414.1516x2Cut	2' Cut
		414.1516x3Cut	3' Cut
		414.1516x4Cut	4' Cut
		414.1516x5Cut	5' Cut
		414.1516x6Cut	6' Cut

Stock Sizes		Non-Stock Sizes	
9/16" Thick			
Part Number	Size	Part Number	Size
415.916x2x3	2' x 3'	415.916x2x75	2' x 75'
415.916x3x5	3' x 5'	415.916x3x75	3' x 75'
		415.916x4x75	4' x 75'
		415.916x5x75	5' x 75'
		415.916x6x75	6' x 75'
<b>Cut Sizes up to 75' in length</b>			
<b>Note:</b> 5' and 6' widths are seamed and only available in Black or Black/Yellow.		415.916x2Cut	2' Cut
		415.916x3Cut	3' Cut
		415.916x4Cut	4' Cut
		415.916x5Cut	5' Cut
		415.916x6Cut	6' Cut

Specify Color: Black (BK), Gray (GY), Black/Yellow (BYL), Black/Chevron (CHV) when ordering.

### Special Custom Widths and Lengths \*

Black/Yellow	Black	Size
414.1516Cust0-2BYL	414.1516Custom0-2BK	Up to 2' up to 150'
414.1516Cust2-3BYL	414.1516Custom2-3BK	2' to 3' up to 150'
414.1516Cust3-4BYL	414.1516Custom3-4BK	3' to 4' up to 150'
414.1516Cust4-6BYL	414.1516Custom4-6BK	4' to 6' up to 150'
414.1516Cust6-8BYL	414.1516Custom6-8BK	6' to 8' up to 150'
	414.1516Custom8-9BK	8' to 9' up to 150'
414.1516Cust8-11BYL		8' to 11' up to 150'
	414.1516Custom9-12BK	9' to 12' up to 150'

### Special Custom Widths and Lengths \*

Black/Yellow	Black	Size
415.916Cust0-2BYL	415.916Custom0-2BK	Up to 2' up to 150'
415.916Cust2-3BYL	415.916Custom2-3BK	2' to 3' up to 150'
415.916Cust3-4BYL	415.916Custom3-4BK	3' to 4' up to 150'
415.916Cust4-6BYL	415.916Custom4-6BK	4' to 6' up to 150'
415.916Cust6-8BYL	415.916Custom6-8BK	6' to 8' up to 150'
	415.916Custom8-9BK	8' to 9' up to 150'
415.916Cust8-11BYL		8' to 11' up to 150'
	415.916Custom9-12BK	9' to 12' up to 150'

\*5' minimum length.

#### Specs

#### Uses

#### Compound

#### Compression

#### Coefficient of Friction

#### Tabor Abrasion

#### Flammability

#### Edges

#### Thickness

#### UltraSoft

All dry work areas

Vinyl surface with a double thick Nitricell® sponge base

.50 inche @ 35 psi per ASTM D575

.68 Dry per ASTM F1677

1% lost @ 1,000 cycles per Fed Std. 191

"A" Rating per MVSS 302

Safety beveled

Approx. 15/16"

#### Standard

All dry work areas

Vinyl surface with a Nitricell® sponge base

.415 inche @ 35 psi per ASTM D575

.68 Dry per ASTM F1677

1% lost @ 1,000 cycles per Fed Std. 191

"A" Rating per MVSS 302

Safety beveled

Approx. 9/16"

## **C** All Diamond-Plate mats can be Customized!

In fact, we frequently make Diamond-Plate SpongeCote® No. 415, UltraSoft Diamond-Plate No. 414 and now, Diamond-Plate with GritWorks!® No. 416, in custom lengths, widths and unique configurations. If you have a "U" or "L" shaped work area we can make a mat to fit it. If your space requires a circular, oval or triangle mat, simply give us a template.

And if you have cut-outs in odd places, we can accommodate that too. Basically the **sky is the limit** when it comes to customizing Diamond-Plate.

Some mats may require two or more sections depending on size, weight and shipping requirements. Square edges are also available.

Please call for pricing.

