


The Diamond-Plate Family

3 YEAR WARRANTY

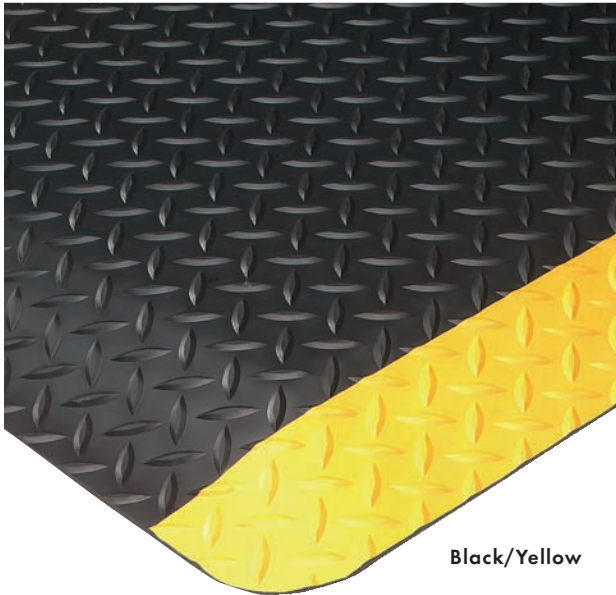

Black/Yellow


Performance: **ULTIMATE**

If you want to be a hero to your employees, buy **UltraSoft Diamond-Plate!** It provides **unparalleled comfort**, resulting in enhanced employee productivity and morale. UltraSoft's long-term performance and exceptional feel are due to its double-thick Nitricell® Sponge base. Nitricell® is a unique composite loaded with Nitrile rubber for exceptional rebound and resilience. Designed for heavy-use areas, the popular, high-tech diamond-plate surface resists abrasion and most chemical spills, and is available with colored borders for maximum safety awareness. All edges are safety beveled.

Performance: **BEST**

Diamond-Plate SpongeCote is the **original Diamond-Plate** anti-fatigue mat and definitely sets the standard for comfort in the industry. It is, without a doubt, one of the most popular anti-fatigue mats on the market today because it offers the complete package of comfort, enhanced productivity, long-term performance and an industrial image. It is identical to UltraSoft Diamond-Plate with one exception. Its Nitricell® Sponge base is a standard 3/8" thick.

C As an added bonus, both versions can be customized in virtually any width or dimension to fit even the most unique work area.

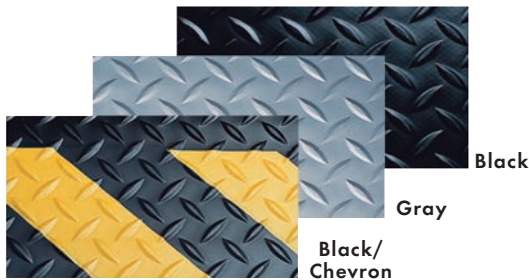


Black

Gray


Black/
Chevron

UltraSoft Diamond-Plate No. 414

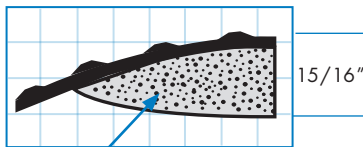


15/16"

Double thick Nitricell® sponge base




Diamond-Plate SpongeCote® No. 415

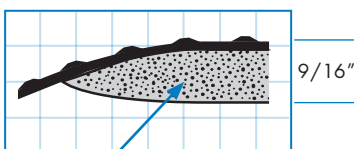

9/16"

Nitricell® sponge base



No. 414

No. 415

| Stock Sizes | | Non-Stock Sizes | |
|--------------------------------------|---------|-----------------|----------|
| 15/16" Thick | | | |
| Part Number | Size | Part Number | Size |
| 414.1516x2x3 | 2' x 3' | 414.1516x2x75 | 2' x 75' |
| 414.1516x3x5 | 3' x 5' | 414.1516x3x75 | 3' x 75' |
| | | 414.1516x4x75 | 4' x 75' |
| | | 414.1516x5x75 | 5' x 75' |
| | | 414.1516x6x75 | 6' x 75' |
| Cut Sizes up to 75' in length | | | |
| | | 414.1516x2Cut | 2' Cut |
| | | 414.1516x3Cut | 3' Cut |
| | | 414.1516x4Cut | 4' Cut |
| | | 414.1516x5Cut | 5' Cut |
| | | 414.1516x6Cut | 6' Cut |

Note: 5' and 6' widths are seamed and only available in Black or Black/Yellow.

| Stock Sizes | | Non-Stock Sizes | |
|--------------------------------------|---------|-----------------|----------|
| 9/16" Thick | | | |
| Part Number | Size | Part Number | Size |
| 415.916x2x3 | 2' x 3' | 415.916x2x75 | 2' x 75' |
| 415.916x3x5 | 3' x 5' | 415.916x3x75 | 3' x 75' |
| | | 415.916x4x75 | 4' x 75' |
| | | 415.916x5x75 | 5' x 75' |
| | | 415.916x6x75 | 6' x 75' |
| Cut Sizes up to 75' in length | | | |
| | | 415.916x2Cut | 2' Cut |
| | | 415.916x3Cut | 3' Cut |
| | | 415.916x4Cut | 4' Cut |
| | | 415.916x5Cut | 5' Cut |
| | | 415.916x6Cut | 6' Cut |

Note: 5' and 6' widths are seamed and only available in Black or Black/Yellow.

Specify Color: Black (BK), Gray (GY), Black/Yellow (BYL), Black/Chevron (CHV) when ordering.

Special Custom Widths and Lengths *

| Black/Yellow | Black | Size |
|---------------------|----------------------|----------------------|
| 414.1516Cust0-2BYL | 414.1516Custom0-2BK | Up to 2' up to 150' |
| 414.1516Cust2-3BYL | 414.1516Custom2-3BK | 2' to 3' up to 150' |
| 414.1516Cust3-4BYL | 414.1516Custom3-4BK | 3' to 4' up to 150' |
| 414.1516Cust4-6BYL | 414.1516Custom4-6BK | 4' to 6' up to 150' |
| 414.1516Cust6-8BYL | 414.1516Custom6-8BK | 6' to 8' up to 150' |
| | 414.1516Custom8-9BK | 8' to 9' up to 150' |
| 414.1516Cust8-11BYL | | 8' to 11' up to 150' |
| | 414.1516Custom9-12BK | 9' to 12' up to 150' |

Special Custom Widths and Lengths *

| Black/Yellow | Black | Size |
|--------------------|---------------------|----------------------|
| 415.916Cust0-2BYL | 415.916Custom0-2BK | Up to 2' up to 150' |
| 415.916Cust2-3BYL | 415.916Custom2-3BK | 2' to 3' up to 150' |
| 415.916Cust3-4BYL | 415.916Custom3-4BK | 3' to 4' up to 150' |
| 415.916Cust4-6BYL | 415.916Custom4-6BK | 4' to 6' up to 150' |
| 415.916Cust6-8BYL | 415.916Custom6-8BK | 6' to 8' up to 150' |
| | 415.916Custom8-9BK | 8' to 9' up to 150' |
| 415.916Cust8-11BYL | | 8' to 11' up to 150' |
| | 415.916Custom9-12BK | 9' to 12' up to 150' |

*5' minimum length.

Specs

Uses

Compound

Compression

Coefficient of Friction

Tabor Abrasion

Flammability

Edges

Thickness

UltraSoft

All dry work areas

Vinyl surface with a double thick Nitricell® sponge base

.50 inche @ 35 psi per ASTM D575

.68 Dry per ASTM F1677

1% lost @ 1,000 cycles per Fed Std. 191

"A" Rating per MVSS 302

Safety beveled

Approx. 15/16"

Standard

All dry work areas

Vinyl surface with a Nitricell® sponge base

.415 inche @ 35 psi per ASTM D575

.68 Dry per ASTM F1677

1% lost @ 1,000 cycles per Fed Std. 191

"A" Rating per MVSS 302

Safety beveled

Approx. 9/16"

C All Diamond-Plate mats can be Customized!

In fact, we frequently make Diamond-Plate SpongeCote® No. 415, UltraSoft Diamond-Plate No. 414 and now, Diamond-Plate with GritWorks!® No. 416, in custom lengths, widths and unique configurations. If you have a "U" or "L" shaped work area we can make a mat to fit it. If your space requires a circular, oval or triangle mat, simply give us a template.

And if you have cut-outs in odd places, we can accommodate that too. Basically the **sky is the limit** when it comes to customizing Diamond-Plate.

Some mats may require two or more sections depending on size, weight and shipping requirements. Square edges are also available.

Please call for pricing.

