


ComfortPro™ No. 433



3 YEAR WARRANTY



Performance: BEST

ComfortPro™ performs like a true professional in heavy use applications, but is priced for economy. Its flexible and easy to clean vinyl surface adds to the overall comfort of the mat while also providing good resistance to common industrial chemicals and solvents. The Nitricell® sponge base is exceptionally resilient and resists the abuse of multiple shifts. Now, it's available in two thicknesses: **Standard - 1/2"** **New UltraSoft - 7/8"** ComfortPro™, it's ergonomics at work!


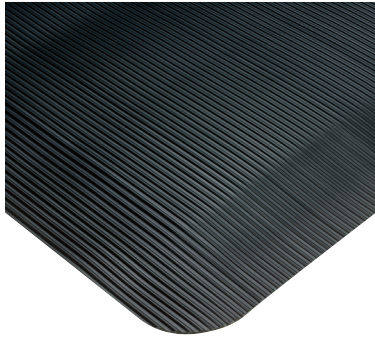


Size	1/2" Thick Stock Sizes	7/8" Thick Stock Sizes
Size	Part Number	Part Number
2' x 3'	433.12x2x3BK	433.78x2x3BK
3' x 5'	433.12x3x5BK	433.78x3x5BK
Size	Non-Stock Sizes	Non-Stock Sizes
Size	Part Number	Part Number
2' x 75'	433.12x2x75BK	433.78x2x75BK
3' x 75'	433.12x3x75BK	433.78x3x75BK
4' x 75'	433.12x4x75BK	433.78x4x75BK
Cut Sizes up to 75' in length		
2' Cut	433.12x2CutBK	433.78x2CutBK
3' Cut	433.12x3CutBK	433.78x3CutBK
4' Cut	433.12x4CutBK	433.78x4CutBK

Standard ComfortPro

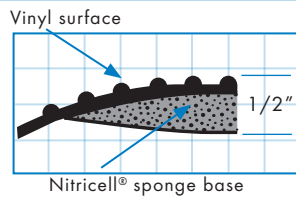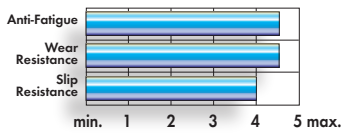

UltraSoft ComfortPro

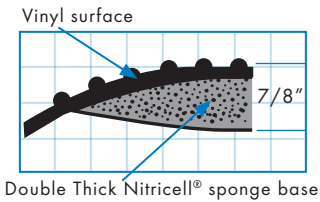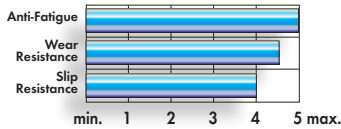

C Square edges, custom widths and unique configurations are available. Please call for pricing.

Specs

Uses	All dry work areas
Compound	Vinyl surface with a Nitricell® sponge base
Compression 1/2" Thick	.31 inches @ 35 psi per ASTM D575
Compression 7/8" Thick	.42 inches @ 35 psi per ASTM D575
Coefficient of Friction	.84 Dry per ASTM F1677
Tabor Abrasion	< 1% lost @ 1,000 cycles per Fed Std. 191
Flammability	"A" Rating per MVSS 302
Edging	Safety beveled
Color	Black (BK)